

EQUIPMENT DIRECTORY



NEWER MACHINE RENTAL INVENTORY

PROMPT DELIVERY

QUICK SERVICE RESPONSE







REV-042022

TABLE OF CONTENTS



CAT RENTAL STORE RENTAL FLEET

Mini Excavators Small Excavators Small Dozers Backhoe Loaders Compact Wheel Loaders Small Wheel Loaders Multi-Terrain Loaders Compact Track Loaders	2 2 2 2 2 	Rough Terrain Forklifts Telehandlers Straight Boom Lifts Articulating Boom Lifts Scissor Lifts Motor Graders Sweepers Asphalt Compactors
Skid Steer Loaders		Soil Compactors

3 Agricultural Tractors Off-Road Dump Trucks 2 Off-Road Water Trucks On-Road Dump Trucks On-Road Water Trucks... Crash Attenuator Trucks... Water Trailers ... All-Terrain Vehicles . Air Compressors ...

Trailers. Light Towers ... 4 Attachments. Locations & Phone Numbers 5 -5

352.797.9500 Brooksville. 386.947.4939 Daytona Beach Jacksonville 904.714.3517 Lake City. 386.961.0392 Lakeland. 863.606.0512 352.620.0660 Ocala.. Orlando.. 407.856.4851

HEAVY EQUIPMENT RENTAL FLEET

Wheeled Excavators	Medium Wheel Loaders
Medium Excavators	Motor Graders
Large Excavators 8	Pavers
Long Reach Excavators 8	Asphalt Compactors
Medium Dozers	
Large Dozers	Soil Compactors

Road Wideners . Remixing Transfer Vehicles Sweepers . 9 Soil Mixers/Reclaimers 9 Air Curtain Burners . q Articulated Trucks . 10

Tractor Scrapers Off-Road Water Wagons On-Road Water Trucks	10
Locations & Phone Numbers	10

7

TALLAHASSEE | PERRY | LAKE CITY | GAINESVILLE OCALA | JACKSONVILLE | ST. AUGUSTINE 904.737.7730 ext. 1284

813.671.3700 ext. 8111

UTILITY EQUIPMENT RENTAL FLEET

8

Vacuum Trucks	Mini Digger Derricks Hireach Pressure Drills
Bucket Trucks 12	Trailers

Locations & Phone Numbers 12 ... 12 12 . 12 12 12

JACKSONVILLE | ST. AUGUSTINE | ORLANDO | OCALA 904.256.1783

POWER SYSTEMS RENTAL FLEE	ET 13	POWEI	R SYSTEMS R
Portable Generators 14 Air Conditioners Transformers 14 Electric Heaters Double Wall Fuel Tanks 14 Distribution Equipment & Ac Electric Water Chillers - Air Cooled 14 Electrical Formulas Air Handlers 15 Amperage Chart		TALLAHASSEE PERRY LAKE CITY GAINESVILLE JACKSONVILLE ST. AUGUSTINE 904.494.1242	OCALA BROOKSVILLE SARASOTA 813.865.2518

COMPRESSED AIR RENTAL FLEET			COMPRESSED AIR R
Portable Diesel Air Compressors 19 Desiccant Air Dryers Boosters 19 High Pressure Desiccant Air Dryers Electric Industrial Air Compressors 19 Compressed Air Products & Accessories Oil Free Air Compressors 19 Pressure Loss in Air Hoses Chart Surface Prep Equipment 19 Sandblast Nozzles Air Requirement Charts	19 19 20	NORTH FLORIDA 904.237.2371	WEST CENTRAL FLORIDA 813.781.7093

LIFT TRUCKS REN	TAL FLEET	2	21	LIF	FT TRUCKS F
IC Pneumatic Tire Forklifts	Electric Counterbalanced Forklifts		JACKSO 904.448	DNVILLE TALLAHASSEE ST AUGUSTINE 8.5438	TAMPA ST. PETERSBU 813.865.2027

CRANE RENTAL FLEET	24	CRANE R
Crawler Cranes25Rough Terrain Cranes25Locations & Phone Numbers26All-Terrain Cranes25Boom Trucks25Truck Mounted Cranes25Industrial Cranes25	ST. AUGUSTINE 904.494.7653	

PHONE DIRECTORY

CAT RENTAL STORE LOCATIONS & PHONE NUMBERS

Palm Bay	321.725.6420
Sarasota	941.359.6050
St. Augustine	
St. Petersburg	
Tallahassee	850.514.1958
Татра	813.671.3200

HEAVY EQUIPMENT RENTAL LOCATIONS & PHONE NUMBERS

BROOKSVILLE | LAKELAND | TAMPA | SARASOTA

DAYTONA | ORLANDO | PALM BAY 407.855.6195 ext. 3202

UTILITY EQUIPMENT RENTAL LOCATIONS & PHONE NUMBERS

TALLAHASSEE | LAKELAND | TAMPA | POMPANO 904.256.1763

RENTAL LOCATIONS & PHONE NUMBERS

LE | LAKELAND | TAMPA

DAYTONA | ORLANDO | PALM BAY 407.472.6235

RENTAL LOCATIONS & PHONE NUMBERS

EAST CENTRAL FLORIDA 407.202.5702

SOUTH FLORIDA 561.221.4608 | 561.756.1651

RENTAL LOCATIONS & PHONE NUMBERS

BURG | SARASOTA | LAKELAND ORLANDO | OCALA | DAYTONA | BREVARD 407.857.1973

RENTAL LOCATIONS & PHONE NUMBERS



MINI EXCAVATORS



300.9D	18 HP	2,170 lbs. op. wt.	Max. 5'8" depth/9'11" reach
301.5	21 HP	3,900 lbs. op. wt.	Max. 8'4" depth/12'11" reach
301.7	21 HP	3,900 lbs. op. wt.	Max. 7'11" depth/12'9" reach
301.8	21 HP	4,450 lbs. op. wt.	Max. 8'5" depth/13'2" reach
302	21 HP	4,800 lbs. op. wt.	Max. 8'6" depth/13'9" reach
303E CR	24 HP	7,400 lbs. op. wt.	Max. 9'0" depth/16'3" reach
303.5E2 CR	24 HP	8,200 lbs. op. wt.	Max. 10'4" depth/17'5" reach
304 CR	40 HP	9,000 lbs. op. wt.	Max. 11'3" depth/18'4" reach
304 CR	40 HP	9,000 lbs. op. wt.	Max. 11'3" depth/18'4" reach
305 CR	40 HP	11,500 lbs. op. wt.	Max. 12' depth/19'1" reach
306 CR	56 HP	15,800 lbs. op. wt.	Max. 13'6" depth/21'11" reach
307.5	58 HP	18,150 lbs. op. wt.	Max. 15'3" depth/22'4" reach
308 CR SWING BOOM	70 HP	20,100 lbs. op. wt.	Max. 15'5" depth/24'9" reach
309 CR	70 HP	21,100 lbs. op. wt.	Max. 15'1" depth/25' reach
310	70 HP	22,500 lbs. op. wt.	Max. 17'1" depth/25' reach
MINI EXCAVATO	RS WITH THU	JMB	
303.5E2 CR	24 HP	8,200 lbs. op. wt.	Max. 10'4" depth/17'5" reach
306CR	56 HP	15,800 lbs. op. wt.	Max. 13'6" depth/21'11" reach
308 CR	65 HP	18,500 lbs. op. wt.	Max. 15'5" depth/24'9" reach
MINI EXCAVATO	RS WITH HAI	MMER	
304 CR	40 HP	9,000 lbs. op. wt.	Max. 11'3" depth/18'4" reach
308 CR	65 HP	18,500 lbs. op. wt.	Max. 15'5" depth/24'9" reach
MINI EXCAVATO	RS WITH MU	LCHER HEAD	
308 CR	70 HP	20,100 lbs. op. wt.	Max. 15'5" depth/24'9" reach
309 CR	70 HP	21,100 lbs. op. wt.	Max. 15'1" depth/25' reach

SMALL DOZERS

1	II	1	-	
			1	1
		1		Ŀ
				-

D3K2 LGP/D1	80 HP	19,000 lbs. op. wt.	6-Way Blade		
D5K2 LGP/D3	104 HP	22,000 lbs. op. wt.	6-Way Blade		
vailable attachments include: GPS. Laser AccuGrade™.					

COMPACT WHEEL LOADERS

100
load/2,720 lbs capacity

Based on St	traight Load w	vith bucket attached.		
903D	40 HP	9,200 lbs. op. wt.	5,440 lbs tip load/2,720 lbs capacity	
906M	68 HP	12,500 lbs. op. wt.	9,200 lbs tip load/4,600 lbs capacity	
908M	68 HP	14,300 lbs. op. wt.	10,200 lbs tip load/5,100 lbs capacity	
Available attachments include: Booms, buckets, forks, material handling arms, rakes.				

MULTI-TERRAIN LOADERS




257D*** 73 HP 8,300 lbs. op. wt. 5,680 lbs. tip load/2,800lbs. capacity *** Vert Lift/Hi-Flow



*All specifications are estimates.


Newest Fleet in the Industry.

SMALL	EXCAV	ATORS	
311 RR	70 HP	30,600 lbs. op. wt.	Max. 18'4" depth/26'7" reach
313	74 HP	29,300 lbs. op. wt.	Max. 19'9" depth/28'3" reach
315 CR	97 HP	34,000 lbs. op. wt.	Max. 19'6" depth/28'6" reach
316	122 HP	39,300 lbs. op. wt.	Max. 21'7" depth/30'5" reach
317	130 HP	38,900 lbs. op. wt.	Max. 19'11" depth/28'9" reach
320	153 HP	56,500 lbs. op. wt.	Max. 24'10" depth/35' reach
323	161 HP	51,500 lbs. op. wt.	Max. 24'10" depth/35' reach
EXCAVATORS WITH THUMB			
311 RR	70 HP	31,100 lbs. op. wt.	Max. 18'2" depth/26'10" reach
316	113 HP	39,300 lbs. op. wt.	Max. 21'7" depth/30'5" reach
320	153 HP	56,500 lbs. op. wt.	Max. 24'10" depth/35' reach
EXCAVATOR	S WITH НАМ	MER	
315	97 HP	34,000 lbs. op. wt.	Max. 19'6" depth/28'6" reach
320F L	153 HP	56,500 lbs. op. wt.	Max. 24'10" depth/35' reach





BACKHOE LOADERS



Available attachments include: Ditch buckets, forks, E-Sticks, hydraulic hammers. Backhoe bucket sizes: 12" to 36" Fork length: 48"

SMALL WHEEL LOADERS

Based on Straight Load with bucket attached.			
914M	92 HP	18,200 lbs. op. wt.	
926M	146 HP	28,500 lbs. op. wt.	
930M	164 HP	31,000 lbs. op. wt.	



12,450 lbs tip load/6,225 lbs capacity 19,380 lbs tip load/9,690 lbs capacity 21,900 lbs tip load/10,950 lbs capacity

COMPACT TRACK LOADERS

239D3	67 HP	7,400 lbs. op. wt.
249D3*	67 HP	7,800 lbs. op. wt.
259D3***	73 HP	8,900 lbs. op. wt.
279D3**	73 HP	9,900 lbs. op. wt.
289D3***	73 HP	10,800 lbs. op. wt.
299D3***	95 HP	10,800 lbs. op. wt.
299D3 XHP*	106 HP	11,800 lbs. op. wt.
*Vert Lift **Hi-H	low *** Ver	t Lift/Hi-Flow



4,100 lbs. tip load/2,050 lbs. capacity 4,600 lbs. tip load/2,300 lbs. capacity 5,800 lbs. tip load/2,900 lbs. capacity 5,870 lbs. tip load/2,935 lbs. capacity 7,600 lbs. tip load/3,800 lbs. capacity 8,500 lbs. tip load/4,250 lbs. capacity 9,100 lbs. tip load/4,550 lbs. capacity

SKID STEER LOADERS



8

226D3	56 HP	6,000 lbs. op. wt.	3,000 lbs. tip load/1,500 lbs. capacity
242D3*	73 HP	7,000 lbs. op. wt.	4,300 lbs. tip load/2,150 lbs. capacity
246D3**	73 HP	7,500 lbs. op. wt.	4,300 lbs. tip load/2,150 lbs. capacity
262D3***	73 HP	8,100 lbs. op. wt.	5,400 lbs. tip load/2,700 lbs. capacity
*Vert Lift **Hi-Flow *** Vert Lift/Hi-Flow			

Available attachments include: Sod rollers, cold planers, trenchers, vibrato forks, grapples, augers, brooms, hammers, brush cutters. Solid tires also av

CAT TELEHANDLERS

TH255C	11,000 lbs. op. wt.	5,500 lbs. capacity	18' lift height
TL642D	23,600 lbs. op. wt.	6,500 lbs. capacity	42' lift height
TL943D	27,000 lbs. op. wt.	9,000 lbs. capacity	43' lift height
TL1055D	34,900 lbs. op. wt.	10,000 lbs. capacity.	55′ lift height
TL1255D	39,200 lbs. op. wt.	12,000 lbs. capacity	55' lift height

Available attachments include: Buckets, pallet forks, block forks, framer's carriages, truss booms, lifting hooks.

ory compactors, available.				
- M				
	GENIE	TELEHANDLE	RS G	2710
	0711 5540	10,000 lbs, size with		

• 4 Wheel Drive • Standard carriage 60"

LK8M

ROUGH TERRIAN FORKLIFTS

• Cat C3.4B 4-Cylinder turbo diesel engine • Cat 4-Speed fully synchromesh power shuttle transmission

GTH-5519	10,900 lbs. op. wt.	5,500 lbs. capacity	19' lift height
GTH-844	22,600 lbs. op. wt.	8,000 lbs. capacity	44' lift height
GTH-1056	30,000 lbs. op. wt.	10,000 lbs. capacity	56' lift height

74 HP 8,000 lbs. lift capacity Mast height range 10-21'

SKYTF	RAK
6042	25,100 lbs. op. wt.

SKYTRAK	F.
. 6,000 lbs. capacity 42' lift heig	nt

KLIFTKING Manufacturing Corp.

	- · · · · · · · · · · · · · · · · · · ·	.,	- J
10054	28,200 lbs. op. wt.	10,000 lbs. capacity	53' lift height
1644	33,700 lbs. op. wt.	15,650 lbs. capacity	44' lift height
2733	38,775 lbs. op. wt.	26,600 lbs. capacity	33' lift height



GENIE STRAIGHT BOOM LIFTS

S45	45' platform ht.	500 lbs. capacity	15,500 lbs. op. wt.
S65	65' platform ht.	500 lbs. capacity	23,000 lbs. op. wt.
S85	85' platform ht.	500 lbs. capacity	38,000 lbs. op. wt.
S125	125' platform ht.	500 lbs. capacity	45,000 lbs. op. wt.
SX180	180′ platform ht.	750 lbs. capacity	54,000 lbs. op. wt.

GENIE ARTICULATING BOOM LIFTS

			· · · · · · · · · · · · · · · · · · ·	
Z34/22N*	34'6" platform ht.	500 lbs. capacity	11,500 lbs. op. wt.	
Z45/25 DC*	45' platform ht.	500 lbs. capacity	15,400 lbs. op. wt.	
Z45/25RT***	45' platform ht.	500 lbs. capacity	15,900 lbs. op. wt.	
Z62/40**	60' platform ht.	500 lbs. capacity	23,000 lbs. op. wt.	
Z80/60**	80' platform ht.	500 lbs. capacity	38,000 lbs. op. wt.	
Z135/70**	135' platform ht.	600 lbs. capacity	45,500 lbs. op. wt.	
*Electric **Diesel *** Dual Fuel/Diesel				

Genie

JLG S	TRAIGHT B(DOM LIFTS	
460SJ	46' platform ht.	600 lbs. capacity	16,500 lbs. op. wt.

460SJ 660SJ 65' platform ht. 550 lbs. capacity 500 lbs. capacity 860SJ 86' platform ht. 1350SJ 135' platform ht. 500 lbs. capacity



25,000 lbs. op. wt.

36,000 lbs. op. wt.

GENIE SCISSOR LIFTS

			Sera S
GS1930*	19' platform ht.	30" width	3,000 lbs. op. wt.
GS2632*	26' platform ht.	32" width	4,500 lbs. op. wt.
GS3246*	32' platform ht.	46" width	5,600 lbs. op. wt.
GS2669RT**	26' platform ht.	69" width	7,300 lbs. op. wt.
GS3369RT**	33' platform ht.	69" width	7,900 lbs. op. wt.
*Electric **Diesel			

Genie




ASPHALT COMPACTORS CB1.7* 25 HP 35" drum 3,538 lbs. op. wt. CB1.8* 3,825 lbs. op. wt. 25 HP 39" drum CB2.7 GC* 25 HP 47" drum 5,936 lbs. op. wt. CB2.7* 31 HP 47" drum 6,808 lbs. op. wt. *Double Drun

AG TRAC	TORS	Challeny	aer 💏
MT465	120 HP	95 PTO	10,100 lbs. op. wt.
MT525	140 HP	110 PTO	13,100 lbs. op. wt.
MT555	170 HP	140 PTO	16,400 lbs. op. wt.
MT575	200 HP	165 PTO	16,400 lbs. op. wt.
MT665	295 HP	250 PTO	27,300 lbs. op. wt.



	MF5711	110 HP	85 PTO	18,700 lbs. op. wt.
	MF5712	120 HP	95 PTO	18,700 lbs. op. wt.
	MF7715	155 HP	120 PTO	27,500 lbs. op. wt.
	MF7722	215 HP	165 PTO	30,800 lbs. op. wt.
	MF8732	320 HP	250 PTO	40,000 lbs. op. wt.



ON-ROAD DUMP TRUCKS

5.6 yd³ capacity



CRASH ATTENUATOR TRUCKS

 Crash rated up to 65 mph
 Shatterproof work lights

- Integrated man bask

Single Axle

*All specifications are estimates.

• Solar powered arrow board

*All specifications are estimates.

SM300 3-WHE	EL 25 HP	96" brus	sh 3,100 lbs.
2011 00	OMPACT	UDC	
		0113	0
CS34* CS44B* *Vibratory Soil	74 HP 100 HP	50" drum 66" drum	9,900 lbs. op. wt. 15,300 lbs. op. wt.
800M M	IOWER		
MT465	120 HP	95 PTO	23' boom mower
MT525	140 HP	110 PTO	25' boom mower
BROOM	70 HP	56 PTO	7,000 lbs. op. wt.
	broom attachment	00110	MASSEY FERGUSON
OFF-RO	AD WAT	ER TRUCK	s 🔯
912WW		2,600	gallon capacity
			HYDREWA
ON-ROA	AD WATE	R TRUCKS	
	2 500	gallon capacity	


WATER TRAILERS

• 525 gallon polypropylene tank with internal baffles

- Simple water flow controls and reliable pumps
- Smooth highway and job site towing
- Hydraulic surge brakes
- Height adjustable channels for multiple hitch options
- MADE IN THE USA and DOT compliant







MULTIQUI



LIGHT TOWERS

Night Light Pro II 8kW Cat 1.1 Engine 25' Electric Powered Mast

ATTACHMENTS

Ranger 570 (4 Seater)



POWER BOX RAKES

For clearing and preparing soil in landscape finishing applications, providing evenly spaced seedbed in many soil types and conditions Can dethatch, remove old lawns/weeds, grade, level, rake and remove debris.



LANDSCAPE TILLERS

Perfect work tools for landscaping, agricultural and construction applications. Hardened, replaceable tines quickly pulverize soil, mix other materials into soil and even stabilize and level existing terrain.

BRUSHCUTTERS



High strength, high speed cutting blades efficiently cut brush, small trees and dense overgrowth for easy removal. Ideal for clearing overgrowth from highway medians, utility easements, and for initial land clearing for housing and parks and recreational areas.



MULCHERS

Designed for high performance while cutting and mulching vegetation and undergrowth in typical forest terrain. Reduces saplings, shrubs, and trees into mulched material, making it ideal for environmental maintenence ot to clear land for construction purposes.



AUGERS

Drill holes for footings, fencing, signs and trees. Optimum speed and visibility, break-out capabilities and capacity torque deliver highest possible productivity in most soils. Standard and high flow models.

Ideal for demolition—break up concrete, asphalt, rock or masonry. New models feature improved

breaking productivity, more power and are totally


Allmand

HAMMERS

unique to Caterpillar.









Durable demolition work tools. Easily handle difficult objects like railroad ties, rocks, demolition scrap and recycling debris.

Great for loose, hard-to-handle recyclable material. Pick up irregularly shaped objects, pierce and carry paper, cardboard, wood and light gauge metal scrap.

ATTACHMENTS

ANGLE BLADES

Push dirt and gravel with ease, and efficiently perform finish grade work in construction, landscaping and road building.



VIBRATORY COMPACTORS Ideal for asphalt patchwork and for compacting soil, sand and gravel prior to pouring concrete or laying asphalt. Provide excellent maneuverability for small compacting jobs that do not require a dedicated

SKID STEER FORKS

Load and transport palletized materials quickly and efficiently. Excellent for construction, industrial, agricultural and landscaping applications.



Perfect clean-up work tools. Clean and remove dirt, rock and other debris from streets, parking lots, and factory floors. Also used in paving recycling, demolition and airport maintenance.

COLD PLANERS

Effectively mill asphalt and concrete, restoring surfaces to specifies grades or levels. Available in standard and high flow models.

FORESTRY HEAD

For those in between jobs where mowing and mulching is needed. The Foresty Head can cut up to a 14" tree and reduce 6" saplings into mulch.

Ring Power Rental



ST. AUGUSTINE - Corporate Headquarters 500 World Commerce Pkwy. 904.494.7464

BROOKSVILLE 14300 Ponce De Leon Blvd. 352.797.9500

LAKE CITY 390 S.W. Ring Court 386.961.0392 ORLANDO 9901 Ringhaver Dr. 407.856.4851

PALM BAY

321.725.6420

415 Community College Pkwy. S.E.

 DAYTONA BEACH

 401 N. Tomaka Farms Rd.
 386.947.4939

LAKELAND 3425 Reynolds Rd. 863.606.0512

OCALA

1890 N.W. 63rd St.

352.620.0660

SARASOTA 7500 26th Court E. 941.359.6050

JACKSONVILLE

330 Pecan Park Rd

904.714.3517



MATERIAL HANDLING ARMS

Load, carry and position materials found in industrial, construction and agricultural applications. Also good for transporting and setting trees or shrubs for landscaping.



MULCHING HEAD

Offering front-mounted mulchers for skid steers and boom mounted mulchers for excavators.

LASER GUIDED BOX BLADE

Cat Box Blades are designed for grading and leveling. Each model is designed to operate both manually and automatically with the use of Laser or GPS grading systems.

SMART GRADER BLADE

Cat Smart Grader Blade attachments are for cutting, moving and grading dirt, gravel, sand and virtually any other material used as a base. Can be equipped with laser and GPS.



TALLAHASSEE 32000 Blue Star Highway (Midway) 850.514.1958

ST. PETERSBURG

2700 Gandy Blvd. N.

727.471.2151

TAMPA 10421 Fern Hill Dr. (Riverview) 813.671.3200

CatRentalStore.com

HEAVY EQUIPMENT RENTAL SOLUTIONS



WHEELED EXCAVATORS



Various Size Buckets Various Size Buckets

LARGE EXCAVATORS



336 GC	273 HP	81,000 lbs. op. wt.	3.0 yd ³ Bucket
336	311 HP	82,000 lbs. op. wt.	3.0 yd³ Bucket
349	424 HP	106,000 lbs. op. wt.	4.04 yd ³ Bucket
374	484 HP	159,000 lbs. op. wt.	6.25 yd ³ Bucket

Available attachments include: Thumbs, clean-out buckets.

MEDIUM DOZERS

6-Way Blade
6-Way Blade

D4 LGP	130 HP	30,000 lbs. op. wt.	6-Way Blade
D5 LGP	170 HP	43,000 lbs. op. wt.	6-Way Blade
D6 XL	215 HP	51,000 lbs. op. wt.	S Blade
D6 LGP	215 HP	51,000 lbs. op. wt.	S Blade
D6 LGP PAT	215 HP	51,000 lbs. op. wt.	S Blade
D6 LGP PAT	215 HP	51,000 lbs. op. wt.	S Blade

Available attachments include: GPS, Laser AccuGrade™.

MEDIUM WHEEL LOADERS



	938M	188 HP	36,000 lbs. op. wt.	3.5 yd³ Bucket
	950GC	225 HP	42,000 lbs. op. wt.	4.0 yd ³ Bucket
	950M	250 HP	43,000 lbs. op. wt.	4.0 yd ³ Bucket
	966M	276 HP	52,000 lbs. op. wt.	5.5 yd³ Bucket
	972M	299 HP	55,000 lbs. op. wt.	6.0 yd ³ Bucket
	980M	369 HP	67,000 lbs. op. wt.	7.75 yd³ Bucket

Available attachments include: Buckets, forks, material handling arms, rakes.

PAVERS



AP400	120 HP	8' - 15'6" Screed	29,800 lbs. op. wt.
AP455	120 HP	8' - 15'6" Screed	31,292 lbs. op. wt.
AP500	148 HP	8' - 15'6" Screed	31,772 lbs. op. wt.
AP555	148 HP	8' - 15'6" Screed	33,488 lbs. op. wt.
AP600	174 HP	8' - 15'6" Screed	36,716 lbs. op. wt.
AP655	174 HP	8' - 15'6" Screed	40,560 lbs. op. wt.
AP1000	225 HP	10' - 19'6" Screed	42,620 lbs. op. wt.
AP1055	225 HP	10' - 19'6" Screed	45,090 lbs. op. wt.

*All specifications are estimates.

MEDIUM EXCAVATORS



325	172 HP	50,000 lbs. op. wt.	2.08 – 2.4 yd³ Bucket
326	201 HP	57,100 lbs. op. wt.	2.4 yd ³ Bucket
330GC	202 HP	68,000 lbs. op. wt.	2.4 yd ³ Bucket
330	273 HP	68,000 lbs. op. wt.	2.4 yd ³ Bucket
335	273 HP	77,000 lbs. op. wt.	2.4 yd ³ Bucket

LONG REACH EXCAVATORS



323	172 HP	57,000 lbs. op. wt.	1.0 yd³ Bucket
326	204 HP	69,000 lbs. op. wt.	1.0 yd³ Bucket
330	273 HP	78,000 lbs. op. wt.	1.0 yd ³ Bucket
336	311 HP	94,000 lbs. op. wt.	1.0 yd³ Bucket

LARGE DOZERS

D8	354 HP	88,000 lbs. op. wt.

Available attachments include: GPS, Laser AccuGrade™


MOTOR GRADERS



SU Blade

20	139 HP	14' blade	36,000 lbs. op. wt.
40GC	196 HP	14' blade	39,000 lbs. op. wt.
40	250 HP	14' blade	43,000 lbs. op. wt.

PAVERS





CB4.0	LT COMP	AUTUN			1LI UU	MPACTO		Xe					JULAIE	D TRUC			
	48 HP	51" drum	7,971 lbs. op. wt.	C303A	30 I							725	334 HP	HEAPED SAE 2:1 19.6 yd ³ cap.		eaped sae 2:1 /d ³ cap.	51,000 lbs. o
CB4.4	48 HP	55" drum	8,362 lbs. op. wt.	C307A	74			bs. op. wt.				730	367 HP	23.0 yd ³ cap			53,000 lbs. o
CB7 CB10	100 HP 120 HP	59" drum 67" drum	19,500 lbs. op. wt. 22,000 lbs. op. wt.	C310A	74 ł	HP 53" dru	im 20,160 li	os. op. wt.				740GC	439 HP	29.7 yd ³ cap.			72,000 lbs. o
CB13	142 HP	79" drum	28,000 lbs. op. wt.					WEILE	ER			745	504 HP	32.7 yd³ cap	. 34.7 y	∕d³ cap.	74,000 lbs. o
These are Double	e Drum																
			-	T ,								OFF-F	א חאט	/ATER TF	NICKS		-in-
PNEUM	IATIC CO	MPACT	ORS 💕	PNEU	MATIC	COMPA	CTORS	Will Com				725WW				1	000 gallon ca
CW16*	100 HP	9-wheel	EMPTY 11,500 lbs. FULL 33,	,000 lbs. CT3A	36 HP	9-wheel	5,500	lbs. op. wt.									
								WE	TILER								
			đ	PT:													
SOIL CO)MPACT	ORS	-	ROAD	WIDEN	ERS		na.								п	-11
CS44B*	100 HP	66″ drum	16,000 lbs. op. wt.														
CS10GC*	121 HP	84″ drum	23,500 lbs. op. wt.														
	121 HP	84″ drum	25,000 lbs. op. wt.	W430	83 HP		0/ 40 50/	lha an wit									
		0.4//	04.000 //	14/5.00		widens up to		D lbs. op. wt.									
CS54B*	131 HP	84" drum 84" drum	24,000 lbs. op. wt.	W530	114 HP	widens up to		D lbs. op. wt. D lbs. op. wt.		1		D		Douw			B
CS11GC* CS54B* CS56B* CP54B*		84″ drum <mark>84″ drum</mark> 84″ drum	26,000 lbs. op. wt.	W530) lbs. op. wt.	EILER	,		R	ing	Pow	er®	C	
CS56B*	131 HP 157 HP	84" drum	·	W530) lbs. op. wt.	EILER			R	ing	Powe	er	C /	
CS54B* CS56B* CP54B* CP56B*	131 HP <mark>157 HP</mark> 131 HP	<mark>84″ drum</mark> 84″ drum	26,000 lbs. op. wt. 25,000 lbs. op. wt.	W530) lbs. op. wt.	EILER			R	ing	Powe	er °	CA	
CS54B* CS56B* CP54B* CP56B*	131 HP 157 HP 131 HP 157 HP	<mark>84″ drum</mark> 84″ drum	26,000 lbs. op. wt. 25,000 lbs. op. wt.	W530) lbs. op. wt.	EILER								
CS54B* CS56B* CP54B* CP56B*	131 HP 157 HP 131 HP 157 HP	<mark>84″ drum</mark> 84″ drum	26,000 lbs. op. wt. 25,000 lbs. op. wt.	W530) lbs. op. wt.	EILER		-	TALLAH	HASSE	Powe	RY LA	KE C	ITY G
CS54B* CS56B* CP54B* CP56B*	131 HP 157 HP 131 HP 157 HP	<mark>84″ drum</mark> 84″ drum	26,000 lbs. op. wt. 25,000 lbs. op. wt.	W530) lbs. op. wt.	EILER			TALLAH OCALA	HASSE	E PERF (SONVIL	RY LA .LE S	KE C T. AU	ITY G GUSTII
CS54B* CS56B* CP54B* CP56B* Vibratory Soil **	131 HP 157 HP 131 HP 157 HP	84" drum 84" drum 84" drum	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt.	w530	114 HP) lbs. op. wt.	EILER			TALLAH OCALA	HASSE	E PERF	RY LA .LE S	KE C T. AU	ITY G GUSTII
CS54B* CS56B* CP54B* CP56B* Vibratory Soil **	131 HP 157 HP 131 HP 157 HP *Soil (12' 4'' Blade)	84" drum 84" drum 84" drum	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt.	SWEE	114 HP PERS	widens up to	10′ 19,500	D lbs. op. wt.				TALLAH OCALA	HASSE	E PERF (SONVIL	RY LA .LE S	KE C T. AU	ITY G GUSTII
CS54B* CS56B* CP54B* CP56B* ibratory Soil ** EMIXI 1250	131 HP 157 HP 131 HP 157 HP *Soii (12' 4'' Blade) NG TRAI	84" drum 84" drum 84" drum NSFER V 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt.	t. SCM400	114 HP	widens up to) lbs. op. wt.	EILER			TALLAH OCALA	HASSE	E PERF (SONVIL	RY LA .LE S	KE C T. AU	ITY G GUSTI
CS54B* CS56B* CP54B* CP56B* ibratory Soil ** EEMIXI E1250 :1650	131 HP 157 HP 131 HP 157 HP *Soil (12' 4'' Blade) NG TRAI 250 HP 11: 250 HP 11:	84" drum 84" drum 84" drum	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt	t. t.	114 HP PERS	widens up to	10′ 19,500	D lbs. op. wt.				tallah ocala 904	HASSE JACK .73	e perf (sonvil) 8 7.7 7	ry La .le s 730	AKE C T. AU C	ITY G GUSTII
CS54B* CS56B* CP54B* CP56B* Vibratory Soil ** REMIXI	131 HP 157 HP 131 HP 157 HP *Soil (12' 4'' Blade) NG TRAI 250 HP 11: 250 HP 11:	84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt	t. t.	114 HP	widens up to	10′ 19,500	D lbs. op. wt.				TALLAH OCALA 904 BROOM	HASSE JACH 1.73 (SVILLI	E PERF (SONVIL 8 7.7 7	RY LA .LE S 730 :LAND	KE C T. AU C)	ITY G GUSTII (t. 1 IPA S
CS54B* CS56B* CP54B* CP56B* "Vibratory Soil * "Vibratory Soil * El250 E1250 E1650	131 HP 157 HP 131 HP 157 HP *Soil (12' 4'' Blade) NG TRAI 250 HP 11: 250 HP 11:	84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt	t. t. t.	114 HP	widens up to	10′ 19,500	D lbs. op. wt.				TALLAH OCALA 904 BROOM	HASSE JACH 1.73 (SVILLI	E PERF (SONVIL 8 7.7 7	RY LA .LE S 730 :LAND	KE C T. AU C)	ITY G GUSTII (t. 1 IPA S
CS548* CS568* CP548* CP568* Vibratory Soil ** REMIXI E1250 E1650	131 HP 157 HP 131 HP 157 HP *Soil (12' 4'' Blade) NG TRAI 250 HP 11: 250 HP 11:	84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. 26,000 lbs. op. wt. EHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt er width 76,200 lbs. op. wt	t. t. t.	114 HP	widens up to	10′ 19,500	D lbs. op. wt.				TALLAH OCALA 904 BROOM	HASSE JACH 1.73 (SVILLI	e perf (sonvil) 8 7.7 7	RY LA .LE S 730 :LAND	KE C T. AU C)	ITY G GUSTII (t. 1 IPA S
CS548* CS568* CP548* CP568* Vibratory Soil ** E1250 E1250 E1650 E2850	131 HP 157 HP 131 HP 157 HP *Soil (12" 4" Blade) NG TRAI 250 HP 11: 250 HP 11: 300 HP 11:	84" drum 84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt er width 76,200 lbs. op. wt	t. t. t.	114 НР РЕКS 74 НР	widens up to	10′ 19,500	D lbs. op. wt.				TALLAH OCALA 904 BROOM 813	HASSE JACH 1.73 (SVILLI 8.67	E PERF (SONVIL 8 7.7 7	RY LA LE S 730	KE C T. AU (2)	ITY G. GUSTII (t. 1 IPA S/ (t. 8
CS548* CS568* CP548* CP568* Vibratory Soil ** REMIXI E1250 E1650 E2850	131 HP 157 HP 131 HP 157 HP *Soil (12' 4'' Blade) NG TRAI 250 HP 11: 250 HP 11:	84" drum 84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt er width 76,200 lbs. op. wt	t. t. t.	114 HP	widens up to	10′ 19,500	D lbs. op. wt.				TALLAH OCALA 904 BROOM 813 DAYTO	HASSE JACH 1.73 (SVILLI 5.67	E PERF (SONVIL 87.77 E LAKE 1.37	RY LA LE S 730 CLAND 700	KE C T. AU (2) (TAN (2) (2)	ITY G GUSTII (t. 1 IPA S. (t. 8 Y
CS54B* CS56B* CP54B* CP56B* Vibratory Soil ** REMIXI E1250 E1650 E2850	131 HP 157 HP 131 HP 157 HP *Soil (12" 4" Blade) NG TRAI 250 HP 11: 250 HP 11: 300 HP 11: 300 HP 11:	84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt er width 76,200 lbs. op. wt	t. t. t. t. t. t. t. t. t. t. t. t. t. t	114 НР РЕКS 74 НР	96″	10′ 19,500	D lbs. op. wt.				TALLAH OCALA 904 BROOM 813 DAYTO	HASSE JACH 1.73 (SVILLI 5.67	E PERF (SONVIL 87.77 E LAKE 1.37	RY LA LE S 730 CLAND 700	KE C T. AU (2) (TAN (2) (2)	ITY G GUSTII (t. 1 IPA S. (t. 8
CS54B* CS56B* CP54B* CP56B* (ibratory Soil ** REMIXII 1250 1650 2850 COIL MI SOIL MI S200 RM400	131 HP 157 HP 131 HP 157 HP *Soii (12' 4'' Blade) NG TRAI 250 HP 11: 250 HP 11: 300 HP 11: 300 HP 11: 300 HP 11: 300 HP 11: 300 HP 11: 300 HP 11: 400 HP 11: 100 HP 11: 10	84" drum 84" drum 84" drum 84" drum NSFER V 3" truck hoppe 3" truck hoppe	26,000 lbs. op. wt. 25,000 lbs. op. wt. 26,000 lbs. op. wt. CEHICLES er width 49,500 lbs. op. wt er width 53,000 lbs. op. wt er width 76,200 lbs. op. wt ERS	t. t	114 HP PERS 74 HP	96″	10' 19,500	0 lbs. op. wt.				TALLAH OCALA 904 BROOM 813 DAYTO	HASSE JACH 1.73 (SVILLI 5.67	E PERF (SONVIL 87.77 E LAKE 1.37	RY LA LE S 730 CLAND 700	KE C T. AU (2) (TAN (2) (2)	ITY G GUSTII (t. 1 IPA S, (t. 8 Y










RingPower.com

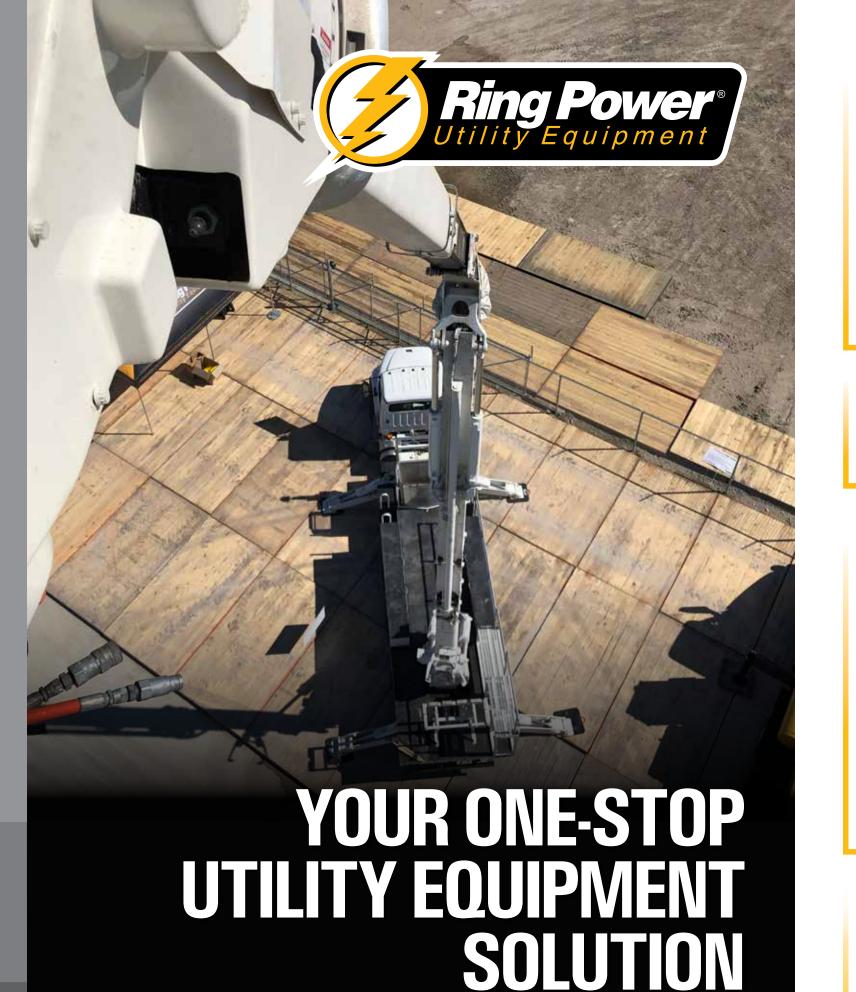

VACUUM TRUCKS 1,300 gal 80 gpm/2,000 psi water pump • Vacuum system: Positive Displacement · 575 GPM hydraulic pump off system 18" HG/6000CFM Hydrxcavation package includes 50' Water pump size: 80GPM@2000PSI retractable reel and high pressure wand • Water tank capacity: 1300 Gallons • DOT arrow board and strobe lights Debris tank size: 12 yd³ 30' of aluminum pipe with clamps • 10' telescopic boom/270° rotation • 180° articulating front hose reel with 500' of jet hose **TRAILER MOUNTED VACUUMS** 990 CFM 10K Dual Axles 535 gal. debris tank 845 gal. debris tank 1,200 CFM 10K Dual Axles **VAC·CON GRAPPLE TRUCKS** 28 yd³ dump body 3,000/7,300 lbs lifting cap. @ 24'/10' 3,000/9,000 lbs lifting cap. @ 26'/10' 53 yd³ dump body PALFINGER **DIGGER DERRICKS** 11,000 lbs. cap. @ 10' radius Max. 47' sheave ht. COMMANDER 4045 11,500 lbs. cap. @ 10' radius Max. 45' sheave ht. **COMMANDER 4047** Max. 47' sheave ht. 11,000 lbs. cap. @ 10' radius **COMMANDER 6060** Max. 60' sheave ht. 18,100 lbs. cap. @ 10' radius **GENERAL 65** 21,000 lbs. cap. @ 10' radius Max. 65' sheave ht. 24,000 lbs. cap. @ 10' radius Max. 80' sheave ht. D115 (Non-Insulated) 29,000 lbs. cap. @ 10' radius Max. 117' sheave ht. * Prinoth Track Unit All trucks available in either 4X2, 4x4 or 6x6. Utilities **MINI DIGGER DERRICKS** 27 HP Max. 42' sheave ht. 3,300 lbs. lifting cap. 32 HP Max. 48' sheave ht 6,000 lbs. lifting cap. *Includes traile SKYLIFT PRESSURE DRILLS



diameter

diameter

diameter

tor Chassis		PIRADRILL
	40' drill depth	72" maximum auger dian
	50' drill depth	72" maximum auger dian
	35' drill depth	72" maximum auger dian

X-CAVATOR

MS500

MS800

M100 L72

M13 A80

C4045 T8*

GENERAL 80

MINI 33 SUPER 6000

LHD 35

LHD 50

STUD 40*

*Cat Excavat

BOOM TRUCKS

1	
i T	102
PO	has

20-TON	
26-TON	
30-TON	
40-TON	(Basket and remote included)

All models available with jib.

90' Max. boom height 103' Max, boom height 102' Max. boom height 105' Max. boom height



BUCKET TRUCKS



TC55 OPTIMA 60' \	working ht.	Non-Overcenter Material Handler
TCX55 OPTIMA 60' \	working ht.	Non-Overcenter Material Handler
HRX55 OPTIMA 60' \	working ht.	Overcenter Material Handler
FC55 60' v	working ht.	Non-Overcenter Personnel
TC65 OPTIMA 70' v	vorking ht.	Non-Overcenter Personnel/Material Handler
TCX65/100 105'	working ht.	Non-Overcenter Personnel
RMX75/100 105'	working ht.	Non-Overcenter Material Handler
TM100 105'	working ht.	Articulated Telescopic Material Handler
TM125 125'	working ht.	Non-Overcenter Material Handler
TL41 46' v	working ht.	Articulated Telescopic Material Handler
TL45 50' v	working ht.	Articulated Telescopic Material Handler
TC55-T8* 60' \	working ht.	Non-Overcenter Material Handler

* Prinoth Track Unit

All trucks available in either 4X2, 4x4 or 6x6.

HIREACH (NON-INSULATED)

M43	48' working height
V60	63' working height
L60	62' working height
G85	85' working height
H110	110' working height
L140	140' working height

All trucks available in either 4X2, 4x4 or 6x6.

500 lbs. lifting cap. 500 lbs. lifting cap. 5,900 lbs. lifting cap. 5,900 lbs. lifting cap. 14,000 lbs. lifting cap. 14,000 lbs. lifting cap.

ELLIOT

1-3 Axles

1-3 Axles

l Itilities

TRAILERS

POLE	10,500 – 22,400 lbs. cap.
REEL	6,500 – 19,000 lbs. cap.
STRINGING Equipment	10,500 – 22,000 lbs. cap.

20' – 74' Length 1–2 Axles 11'2" - 30' Length 11'2" – 30' Length



UTILITY EQUIPMENT HEADQUARTERS 8040 Philips Hwy. Jacksonville FL 32256

COUNT ON US TO POWER YOU UP.

Your One Source for Power Generation and Temperature Control Solutions.





Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight
35kW	480/208	55	2.6	92" x 42"	2,970
60kW	480/208	149	4.27	144" x 44"	4,900
100kW	480/208	190	7.2	124" x 74"	5,800
125kW	480/208	223	9	165" x 45"	10,000
200kW	480/208	306	14	158″ x 44″	14,000
300kW	480/208	470	20	200" x 61"	17,000
350kW	480/208	520	23	208" x 60"	22,000
400kW	480/208	470	25	200" x 61"	17,000
425kW	480/208	520	31	208" x 60"	22,000

Dual voltage output
Convenience outlets

Emissions certified
110% secondary containment

Remote auto-start/stop capability
 Sound attenuated

Above listed units have the ability to provide simultaneous voltage. Units are equipped with customer convenience panels, Fuel Capacity in Gallons GPH rated at 100%, Weight is measured in pounds. Units can be skid mounted.

_	_	ENERATOI tural Gas Mo	-	S P	
Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight

Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight
1250kW	480	N/A	N/A	40' x 8'	70,000
Weight is measured in pounds. Above units have utility-paralleling switchgears.					

TRANSFORMERS



2500 KVA 480:	

4160 Volts 3 Phase Wye and 12,470 Volts 3 Phase Wye. Higher ratings available upon request.

ELECTRIC WATER CHILLERS Air Cooled



30 Ton	Skid Mounted
40 Ton	Skid Mounted
60 Ton	Skid Mounted
80 Ton	Skid Mounted
100 Ton	Skid Mounted
200 Ton	Skid Mounted

*All specifications are estimates.



PA

Ring Power[®]

PORTABLE GENERATOR SETS X0500-X0800



Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight
500kW	480/208	660	30	20' x 8'	32,000
570kW	480/208	700	37	23.5' x 8'	39,500
800kW	480/208	660	55	30' x 8'	39,500

- 208 or 480 volt capable
- Engineered in 20'- 30' containers
- Multi-voltage distribution panel
- Emissions certified
- Sound attenuated

Fuel Capacity in Gallons GPH rated at 100%, Weight is measured in pounds. Above listed units can be used at either 208 or 480 VAC.

PORTABLE GENERATOR SETS X01000-X02000

Size	Voltage	Fuel Capacity	GPH	Dimensions	Weight	
1000kW	480	1250	70	30' x 8'	49,000	
1250kW	480	1250	95	40' x 8'	50,000	
2000kW	480	1250	138	40' x 8'	89,000	

- Reliable, fuel efficient diesel
- Engineered in 40' ISO containers
- Emissions certified
- Sound attenuated
- Utility grade switchgear

Fuel Capacity in Gallons GPH rated at 100%, Weight is measured in pounds. Above units have utility-paralleling switchgears.

DOUBLE WALL FUEL TANKS

550 Gallon

2500 Gallon

Skid Mounted Skid Mounted

Available accessories: 10' x 25' and 15' x 50' Containment Berm & Pumps

ELECTRIC WATER CHILLERS Air Cooled



150 Ton	20' ISO Container on Chassis
200 Ton	20' ISO Container on Chassis
250 Ton	20' ISO Container on Chassis
300 Ton	40' ISO Container on Chassis
400 Ton	40' ISO Container on Chassis
500 Ton	40' ISO Container on Chassis

AIR HANDLERS



20 Ton	Skid Mounted
30 Ton	Skid Mounted
40 Ton	Skid Mounted
100 Ton	Skid Mounted
150 Ton	Skid Mounted

AIR CONDITIONERS



10 Ton	Skid Mounted
25 Ton	Skid Mounted
30 Ton	Skid Mounted
40 Ton	Skid Mounted
60 Ton	Skid Mounted
80 Ton	Skid Mounted
90 Ton	Skid Mounted

ELECTRIC HEATERS

	U
15 kW	
30 kW	
50 kW	
72 kW	
150 kW	

DISTRIBUTION EQUIPMENT & ACCESSORIES

100 Amp Duplex Panel 200 Amp Duplex Panel 100 Amp Quad Box Feeder Panel Quad Box String (30' Spacing) Feed-thru Quad Box (A, B or C Phase) 30' 10/5 Extension Cable 50' 10/5 Extension Cable 100' 10/5 Extension Cable 10' Female Pin & Sleeve Pigtail 50' 2/4 G Pin & Sleeve Extension Cable 400 Amp Pin & Sleeve Splitter Panel

50' 4/0 400 Amp Posi-Lok Cable 3' HD Rubber Cable Ramp End Caps for Ramp 1200 Amp Multipanel 200 Amp Camlok Distribution Box 400 Amp Camlok Distribution Box Spider Box with (6) Duplex Outlets 4-0000, Type W, Class K (400 amp capacity) 4-0000, Type W, Class K "Pigtail" (Female / Male)

ELECTRICAL FORMULAS

TO OBTAIN	Single Phase*	Three Phase*
Kilowatts	v x l x PF 1000	1.732 x v x l x PF 1000
kVA	v x l 1000	1.732 x v x l 1000
Horsepower required when generator kW is known (if generator efficiency is unknown use 0.93)	kW 0.746 x Efficiency (Generator)	kW 0.746 x Efficiency (Generator)
kW input when motor HP is known (if motor efficiency is unknown use 0.85 x HP)	HP x 0.746 Efficiency (Motor)	HP x 0.746 Efficiency (Motor)
Amperes when motor HP known	HP x 746 v x PF x Efficiency	HP x 746 1.732 x v x PF x Efficiency
Amperes when motor kW known	kW x 1000 v x PF	kW x 1000 1.732 x v x PF
Amperes when motor kVA known	kVA x 1000 v	kVA x 1000 1.732 x v

*Alternating Current

kV•A/kW AMPERAGE CHART 80% POWER FACTOR

kV•A	kW	208V	220V	240V	380V	400V	440V	450V	480V	600V	2400V	3300V	4160V
6.3	5	17.5	16.5	15.2	9.6	9.1	8.3	8.1	7.6	6.1	-	-	-
9.4	7.5	26.1	24.7	22.6	14.3	13.6	12.3	12	11.3	9.1	—	—	—
12.5	10	34.7	33	30.1	19.2	18.2	16.6	16.2	15.1	12	_	_	-
18.7	15	52	49.5	45	28.8	27.3	24.9	24.4	22.5	18	—	—	—
25	20	69.5	66	60.2	38.4	36.4	33.2	32.4	30.1	24	6	4.4	3.5
31.3	25	87	82.5	75.5	48	45.5	41.5	40.5	37.8	30	7.5	5.5	4.4
37.5	30	104	99	90.3	57.6	54.6	49.8	48.7	45.2	36	9.1	6.6	5.2
50	40	139	132	120	77	73	66.5	65	60	48	12.1	8.8	7
62.5	50	173	165	152	96	91	83	81	76	61	15.1	10.9	8.7
75	60	208	198	181	115	109	99.6	97.5	91	72	18.1	13.1	10.5
93.8	75	261	247	226	143	136	123	120	113	90	22.6	16.4	13
100	80	278	264	240	154	146	133	130	120	96	24.1	17.6	13.9
125	100	347	330	301	192	182	166	162	150	120	30	21.8	17.5
156	125	433	413	375	240	228	208	204	188	150	38	27.3	22
187	150	520	495	450	288	273	249	244	225	180	45	33	26
219	175	608	577	527	335	318	289	283	264	211	53	38	31
250	200	694	660	601	384	364	332	324	301	241	60	44	35
312	250	866	825	751	480	455	415	405	376	300	75	55	43
375	300	1040	990	903	576	546	498	487	451	361	90	66	52
438	350	1220	1155	1053	672	637	581	568	527	422	105	77	61
500	400	1390	1320	1203	770	730	665	650	602	481	120	88	69
625	500	1735	1650	1504	960	910	830	810	752	602	150	109	87
750	600	2080	1980	1803	1150	1090	996	975	902	721	180	131	104
875	700	2430	2310	2104	1344	1274	1162	1136	1052	842	210	153	121
1000	800	2780	2640	2405	1540	1460	1330	1300	1203	962	241	176	139
1125	900	3120	2970	2709	1730	1640	1495	1460	1354	1082	271	197	156
1250	1000	3470	3300	3009	1920	1820	1660	1620	1504	1202	301	218	174
1563	1250	4350	4130	3765	2400	2280	2080	2040	1885	1503	376	273	218
1875	1500	5205	4950	4520	2880	2730	2490	2440	2260	1805	452	327	261
2188	1750	_	_	5280	3350	3180	2890	2830	2640	2106	528	380	304
2500	2000	—	—	6020	3840	3640	3320	3240	3015	2405	602	436	348
2812	2250	_	_	6780	4320	4095	3735	3645	3400	2710	678	491	392
3125	2500	_	_	7520	4800	4560	4160	4080	3765	3005	752	546	435
3750	3000	_	_	9040	5760	5460	4980	4880	4525	3610	904	654	522
4375	3500	_	_	10550	6700	6360	5780	5660	5285	4220	1055	760	610
5000	4000		_	12040	7680	7280	6640	6480	6035	4810	1204	872	695

The following factors can be used to convert from English to the most common SI Metric values.

MULTIPLY THIS ENGLISH VALUE	BY	TO OBTAIN THIS METRIC VALUE
Tons Refrigerent Effect (ton)	3.516	Kilowatts (kW)
Horsepower (hp)	0.7457	Kilowatts (kW)
Gallons Per Minute (gpm)	0.0631	Liters/Second (L/s)
Number of Feet (ft)	304.8	Millimeters (mm)
Number Of Inches (in)	25.4	Millimeters (mm)
Number Of Pounds (lbs)	0.4536	Kilograms (kg)
Feet Per Second (fps)	0.3048	Meters Per Second (m/s)
Feet of Water (ft)	2.090	Kilopascals (kPa)
Pounds Per Square Inch (psi)	6.895	Kilopascals (kPa)
Square Feet (ft²)	0.09289	Square Meters (m ²)
	Tons Refrigerent Effect (ton) Horsepower (hp) Gallons Per Minute (gpm) Number of Feet (ft) Number Of Inches (in) Number Of Pounds (lbs) Feet Per Second (fps) Feet of Water (ft) Pounds Per Square Inch (psi)	Tons Refrigerent Effect (ton)3.516Horsepower (hp)0.7457Gallons Per Minute (gpm)0.0631Number of Feet (ft)304.8Number of Inches (in)25.4Number Of Pounds (lbs)0.4536Feet Per Second (fps)0.3048Feet of Water (ft)2.090Pounds Per Square Inch (psi)6.895

AMPERAGE CHART

CONVERSION FORMULAS

CONVERSION CHARTS

TEMPERATURE CONVERSION CHART FAHRENHEIT TO CELSIUS

(Celsius temperatures shown are rounded to the nearest degree)

°F	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	°C
0	-18	20	-7	40	4	60	16	80	27	100	38
1	-17	21	-6	41	5	61	16	81	27	101	38
2	-17	22	-6	42	6	62	17	82	28	102	39
3	-16	23	-5	43	6	63	17	83	28	103	39
4	-16	24	-4	44	7	64	18	84	29	104	40
5	-15	25	-4	45	7	65	18	85	29	105	41
6	-14	26	-3	46	8	66	19	86	30	106	41
7	-14	27	-3	47	8	67	19	87	31	107	42
8	-13	28	-2	48	9	68	20	88	31	108	42
9	-13	29	-2	49	9	69	21	89	32	109	43
10	-12	30	-1	50	10	70	21	90	32	110	43
11	-12	31	-1	51	11	71	22	91	33	111	44
12	-11	32	0	52	11	72	22	92	33	112	44
13	-11	33	1	53	12	73	23	93	34	113	45
14	-10	34	1	54	12	74	23	94	34	114	46
15	-9	35	2	55	13	75	24	95	35	115	46
16	-9	36	2	56	13	76	24	96	36	116	47
17	-8	37	3	57	14	77	25	97	36	117	47
18	-8	38	3	58	14	78	26	98	37	118	48
19	-7	39	4	59	15	79	26	99	37	119	48

To convert any Fahrenheit temperature not shown to a Celsius temperature, subtract 32° and multiply by 0.5556. To convert a temperature difference from degrees Fahrenheit (°F) to degrees Celsius (°C), multiply by 0.5556. Values provided in this guide are in the English inch-pound (I-P) system.

RENT WEEKLY & MONTHLY



TALLAHASSEE | PERRY | LAKE CITY | GAINESVILLE JACKSONVILLE | ST. AUGUSTINE


904.494.1242

OCALA | BROOKSVILLE | LAKELAND TAMPA | SARASOTA

813.865.2518

DAYTONA | ORLANDO | PALM BAY

407.472.6235

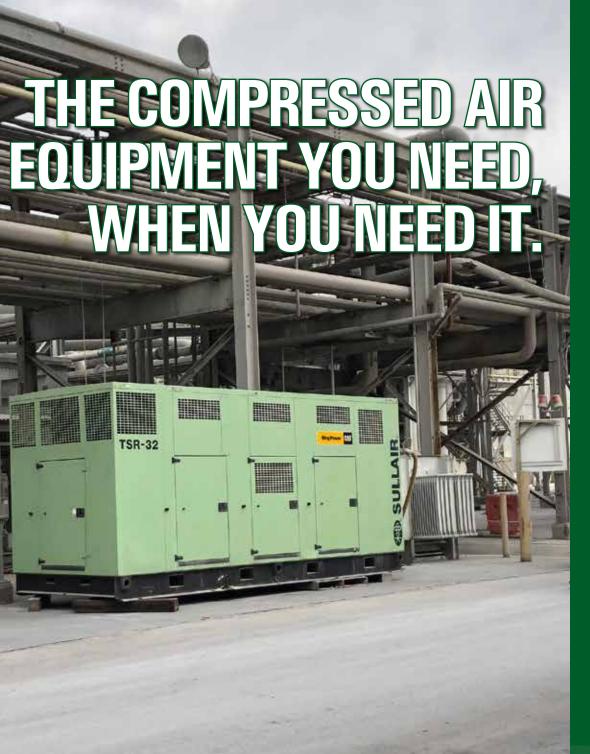

TSR-32


Ring Power®

COMPRESSOR GROU

CompressedAir.RingPower.com

PRESSURE LOSS IN AIR HOSES CHART

Air Pressure Loss in Hose-50 Foot Length (100 PSIG Inlet Pressure = / and 150 PSIG Inlet Pressure =/)

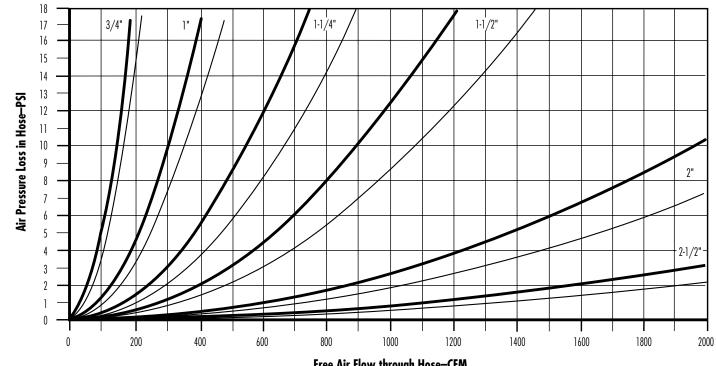

SANDBLAST NOZZLES AIR REQUIREMENTS CHARTS

Approximate Air Consumption (CFM) per Blast Nozzle

	Nozzle Pressure								
	60	70	80	90	100	120	140		
Nozzle Size	PSI	PSI	PSI	PSI	PSI	PSI	PSI		
1/8"	14	16	18	20	22	26	30		
³ /16"	32	36	41	45	49	58	66		
1/4"	57	65	72	80	90	105	121		
⁵ ⁄16"	90	101	113	125	140	160	185		
3⁄8"	126	145	163	182	200	235	270		
7/ ₁₆ "	170	193	215	240	270	315	360		
1/2"	230	260	290	320	350	410	470		
5⁄8"	360	406	454	500	550	640	740		
3⁄4"	518	585	652	720	790	925	1060		





PORTABLE AIR COMPRESSORS Diesel

XAS 400-200	393 CFM	200 PSI	Aftercooled & Filtered "IQ" Air
XAS 950	950/900/754 CFM	100/150/200 PSI	Aftercooled & Filtered "IQ" Air
XRVS 1000+	1000/875 CFM	365/510 PSI	AF "IQ" Air & Fuel Xpert
XRVS 1350	1335 CFM	365 PSI	AF "IQ" Air & Fuel Xpert
XRVS 1550+	1350/1550 CFM	510/365 PSI	Aftercooled and Fuel Xpert
XAS 1800	1600/1800 CFM	150/100 PSI	AF "IQ" Air & Fuel Xpert

Atlas Copco

100-175 PSI 40-75 HP Variable Speed Drive

100-200 HP Variable Speed Drive



400H HAF	400 CFM	200 PSI	Aftercooled & Filtered "IQ" Air		
900H AF	900 CFM	150 PSI	Aftercooled & Filtered "IQ" Air		
900XHH/1150XH	900/1150 CFM	500/350 PSI	Aftercooled Air		
1600H AF	1600 CFM	150 PSI	Aftercooled & Filtered "IQ" Air		



150 PSI	Aftercooled & Filtered "IQ" Air
	Always air. Always there:



TSR-20

OIL FREE AIR COMPRESSORS

DR13-150	650/517 CFM	125/150 PSI	150 HP	"Oil Free
DR13-200	785/639 CFM	125/150 PSI	200 HP	"Oil Free
DE18	1550 CFM	135 PSI	540 HP	"Oil Free









DESICCANT AIR DRYERS

RDH-260	260 SCFM	90" x 42" x 47"	Wt. 1,150 lbs
RDH-450	450 SCFM	90" x 42" x 60"	Wt. 1,800 lbs
RDH-800-S	800 SCFM	83" x 60" x 80"	Wt. 3,200 lbs
RDH-930-G	930 SCFM	80" x 75" x 71"	Wt. 3,800 lbs
RDH-1550-G	1550 SCFM	79" x 83" x 78"	Wt. 5,000 lbs
RDH-2100-G	2100 SCFM	78" x 82" x 102"	Wt. 8,000 lbs
RDH-3000-G	3000 SCFM	81" x 91" x 115"	Wt. 9,200 lbs
RDH-5400-G	5400 SCFM	81" x 91" x 153"	Wt. 16,000 lbs



380-970 CFM

High Press	sure	
RDHHP.715	1200 SCEM @ 350 PSIG	96″ x 7

	1200 001 11 @ 0001 010	30 X70 X30	VVI. 4,000 103
RDHHP-930	1600 SCFM @ 350 PSIG	79" x 78" x 83"	Wt. 4,500 lbs
RDHHP-1550	2800 SCFM @ 350 PSIG	79″ x 78″ x 83″	Wt. 6,150 lbs
RDHHP-930-500	1800 SCFM @ 500 PSIG	79" x 78" x 83"	Wt. 4,500 lbs

100-175 PSI

TSR-32 1000-1600 CFM 100-175 PSI 200-300 HP Variable Speed Drive

BOOSTERS

B7-42/2175 1288 CFM 2175 PSI Pre and After Cooler & Fuel Tank



PRODUCTS & ACCESSORIES

Van Air Deliguescent Air Dryers 200 Gallon Receiver Tank 240 Gallon Receiver Tank 660 Gallon Receiver Tank

3/4" x 50' air hose 2" x 50' air hose 3" x 25' air hose Air Distribution Manifolds Free Air Flow through Hose–CFM

Approximate Abrasive Consumption (LBS/HR) per Blast Nozzle

		Nozzle Pressure								
	60	70	80	90	100	120	140			
Nozzle Size	PSI	PSI	PSI	PSI	PSI	PSI	PSI			
1/8"	90	105	115	130	140	165	190			
³ ⁄16"	209	230	250	290	320	375	430			
1/4"	365	420	460	500	560	660	760			
5/16"	575	650	725	825	900	1050	1200			
3⁄8"	840	945	1050	1155	1260	1475	1700			
⁷ /16"	1150	1300	1450	1600	1750	2050	2350			
1/2"	1460	1660	1850	2000	2250	2650	3000			
5⁄8"	2290	2600	2900	3125	3520	4100	4750			
3⁄4"	3300	3750	4180	4500	5060	5950	6800			

561.221.4608 | 561.756.1651

CompressedAir.RingPower.com



IC PNEUMATIC TIRE FORKLIFTS *Large*



15,500 - 55,000 lbs. Capacity @ 48" Load Center Up to 236" Lift Height

96" Fork Length

Diesel - Full cabs with air conditioning

BRANDS: Kalmar, Cat Lift Trucks, Mitsubishi and Linde

IC CUSHION TIRE FORKLIFTS

3,000 - 15,500 lbs. Capacity Up to 240" Lift Height 36" - 96" Fork Length LP Gas

BRANDS: Cat Lift Trucks, Mitsubishi and Linde

PIGGYBACK & TRUCK MOUNTED FORKLIFTS

3,000 - 8,000 lbs. Capacity (Double Reach, All-Wheel Drive)
Up to 144" Lift Height
36" - 72" Forks, Block Forks and Lumber Forks
Diesel
BRANDS: Navigator, Princeton

3-WHEEL ELECTRIC FORKLIFTS



3,000 - 4,000 lbs. Capacity Up to 240" Lift Height 36 Volt/48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Jungheinrich and Linde

NARROW AISLE ELECTRIC FORKLIFTS

3

3,000 - 4,500 lbs. Capacity Up to 280" Lift Height 24 Volt/36 Volt/ 48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Jungheinrich and Linde

IC PNEUMATIC TIRE FORKLIFTS

3,000 - 15,000 lbs. Capacity Up to 240" Lift Height 42" - 96" Fork Length LP Gas/Diesel

BRANDS: Cat Lift Trucks, Mitsubishi and Linde

VERY NARROW AISLE/ SWIVEL MAST FORKLIFTS

3,000 - 5,500 lbs. Capacity - Side Shifter

Up to 258" Lift Height

42" - 72" Fork Length

LP Gas and Electric

BRANDS: Flexi

ELECTRIC COUNTERBALANCED FORKLIFTS

3,000 - 6,000 lbs. Capacity

Side Shifter

Up to 240" Lift Height

36 Volt/48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Linde, and Jungheinrich

ELECTRIC ORDER PICKERS & DOCK STOCKERS

2,200 - 4,500 lbs. Capacity Up to 240" Lift Height 24 Volt/36 Volt/ 48 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Jungheinrich, Linde and Big Joe

ELECTRIC STRADDLE/WALKIE STACKERS

2,000 - 4,000 lbs. Capacity Up to 194" Lift Height Light or Heavy Duty

BRANDS: Big Joe









ELECTRIC PALLET MOVERS



3,000 - 8,000 lbs. Capacity

Fork Dimensions: 27" x 48" or 27" x 96" (Walk Behind & Rider)

24 Volt Electric

BRANDS: Cat Lift Trucks, Mitsubishi, Linde, Jungheinrich and Big Joe



ATTACHMENTS

Carpet Pole Paper Roll Clamps Single Doubles Double Pallet Handler Carton Clamp Rotators Fork Positioners Multiple Load Handlers Push Pull Forks Clamps Layer Pickers Batteries Chargers

RENT DAILY WEEKLY MONTHLY

Jacksonville | Tallahassee | St Augustine 904.448.5438

Tampa | St. Petersburg | Sarasota | Lakeland 813.865.2027


Orlando | Ocala | Daytona | Brevard 407.857.1973

Manufacturers Represented:

Caterpillar Jungheinrich Linde Mitsubishi Kalmar Princeton Big Joe

LiftTrucks.RingPower.com

*All specifications are estimates.

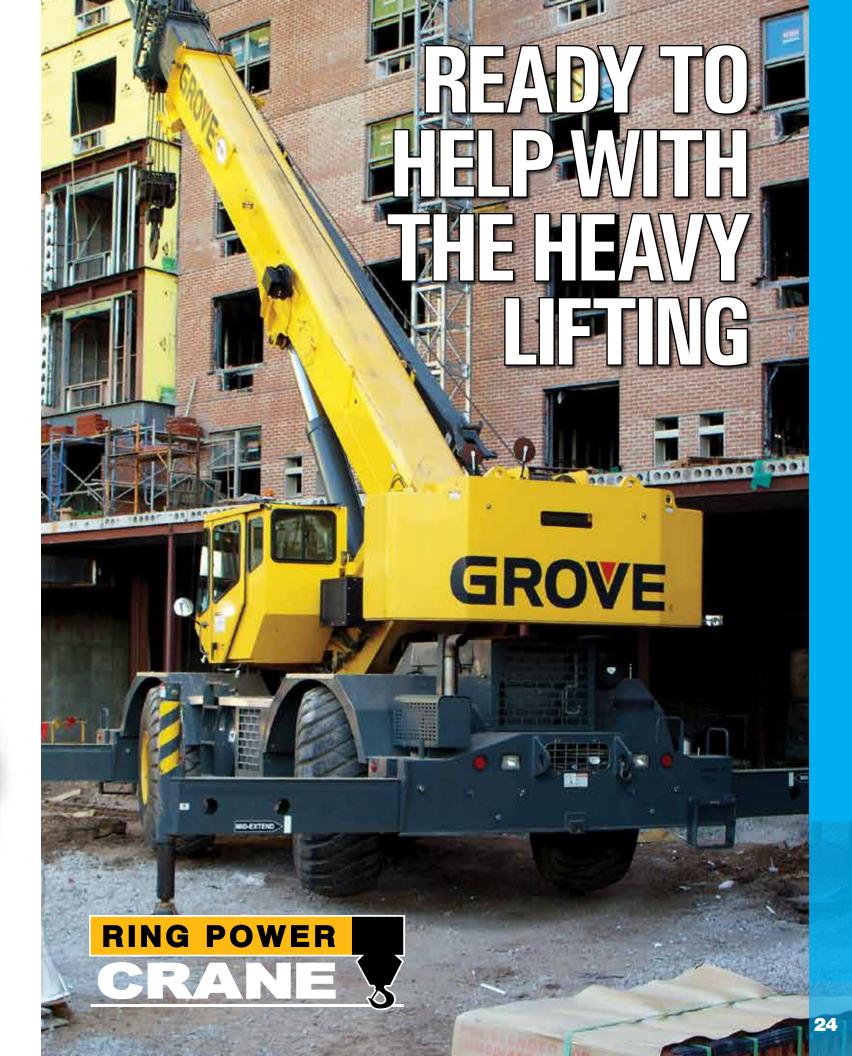

23

CRAWLER CRANES

HYDRAULIC BOOM

30 - 130 Ton Capacity

Telecopic-boom crawler cranes offer the ability to work in smaller areas, closer to loads and are ready to work the moment they arrive on the job site.



LATTICE BOOM **85 - 1000 Ton Capacity**

Mounted on an undercarriage with a set of tracks for stability and mobility, crawler cranes can move around on a job site and perform lifts with little set-up and are capable of traveling with a load.

TRUCK MOUNTED CRANES



40 - 110 Ton Capacity

Mounted on truck carriers for highway travel,

truck mounted cranes require no special transport.

Outriggers extend horizontally from the chassis and

vertically to level and stabilize the crane for hoisting.

ALL-TERRAIN CRANES

60 - 275 Ton Capacity With anywhere from two to seven axles, these

mobile cranes combine the road-ability of truck mounted cranes with the maneuverability of rough terrain cranes, and can travel on public roads or on the job site using all-wheel and crab steering.



GROVE w Manitowoc

ROUGH TERRAIN CRANES

30 - 150 Ton Capacity

Mounted on an undercarriage with four rubber tires, rough terrain cranes are designed for pick-and-carry operations as well as off-road and "rough terrain" applications. Outriggers are used to level and stabilize the crane for hoisting.

INDUSTRIAL CRANES

Designed for plant maintenance and material handling

jobs, both indoors and out, industrial cranes are easy

DMC BRODERSON

to operate, with features such as carry decks, dual

fuel capabilities, and multi-mode steering.



2.5 - 30 Ton Capacity

GROVE

w 🖸 anıtowoc

GROVE

BOOM TRUCKS

8 - 50 Ton Capacity

GROVE

w Canitowoo

Comprised of a telescoping crane boom mounted on a commercial truck body for easy transport, boom trucks are available with either stand-up or swingseat controls.

NATIONAL CRANE



Manufacturers Represented:

Manitowoc Grove National Crane Manitex Broderson Tadano Mantis

RingPowerCrane.com









*All specifications are estimates.

T0P10BENEFITS **OF RENTAL**

NC REPAIR COSTS With rental equipment there is no need for your ownworkshops, helping reduce your operating and

REDUCE YOUR DISPOSAL



Rental gives you access to equipment when you need it most, to support you in those unplanned emergency situations.



With rental, you remove the need for space, releasing capital and reducing your maintenance and security costs.

STC With rental, you don't need to worry about preparing equipment for resale.

maintenance costs.



Rental helps you cost your project in detail, paying for equipment when you need it and helping you budget effectively, resulting in improved **PROFITABILITY**.

GAIN ACCESS TO THE LATFS' ECHNOLO

We're constantly upgrading our rental fleet to provide you access to the latest technology and newer, more efficient models.

MPROVE CASH FLOW

Renting helps release capital and removes associated charges, allowing you to invest in other areas of your business.

MINIMIZE YOUR FOUIPMEN

Rental gives you access to the latest equipment when you need it, so you don't waste time and investment on underutilized equipment.

THE RIGHT EQUIPMENT FOR THE JOB

Our coordinators work with you to select the right equipment to suit your project, helping you be more productive and keeping you safe.





With rental, you can make sure equipment is right for you and your business. We also provide purchase options tailored to you.

